


REFLEXPHOTONICS

The Light on Board™ Company

BRIEF

PRODUCT BRIEF – 100G Ethernet CFP Transceiver Module,

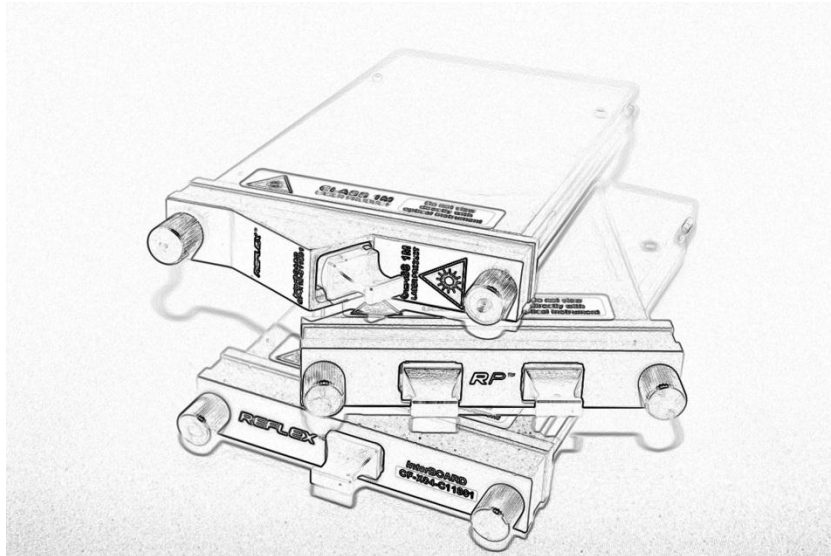

“CONFIDENTIAL AND PROPRIETARY – COPYRIGHT © 2011 REFLEX PHOTONICS INC – ALL RIGHTS RESERVED”

“This document is the property of Reflex Photonics Inc. (“Reflex”) and contents Reflex’s confidential and proprietary information. The holder of this document shall neither use, copy, reproduce, disclose or otherwise deal with the information contained herein except in accordance with the provisions of a non-disclosure agreement executed between Reflex and the holder or in accordance with Reflex’s written instructions.”

The Reflex 100GE / OTU4 CFP transceiver



CF-X12-C11801-02 & CF-X12-C11901-02

Product Summary

The CFP full-duplex modules offer 10 independent transmit and receive channels, each capable of up to 11.2 Gbps operation for an aggregate bandwidth of 110 Gbps over 100 meters of optical fiber. Designed for 100 Gbps Ethernet applications, the Reflex CFP module has a single MPO port which connects to an industry standard 2x12 multi-mode fiber cable.

The Reflex CFP transceiver incorporates CDR retimers on all TX and RX channels for additional electrical signal robustness.

The CFP modules have been designed to meet the harshest external operating conditions including temperature, humidity and EMI interference using Reflex Photonics' next generation, LightABLE™ packaging technology. The modules offer very high functionality and feature integration, accessible via an MDIO interface.


Applications:

- Data center aggregation and core router links
- Test equipment

Specification and Feature Highlights:


- CFP MSA compliant
- Compliant to IEEE 802.3ba specification for 100GBASE-SR10 links
- MDIO digital diagnostic and control capabilities; compliant to CFP MSA Management Interface Specification, Draft 1.4.
- Aggregate Bandwidth of >100 Gbps
- 10 independent full-duplex channels
- TX input and RX output CDR retiming
- Up to 11.2 Gbps per channel bandwidth, supports OTU4
- Independent channel timing
- CXP inter-operable
- Next Generation, LightABLE™ VCSEL/PD array optical sub-assembly technology
- Single +3.3V power supply through 148 pin electrical connector
- Power class 1 (6W typ, < 8W max)
- CML compatible electrical I/O
- Capable of over 100m transmission on high bandwidth 50µm multi-mode ribbon cables

Functional Diagram:

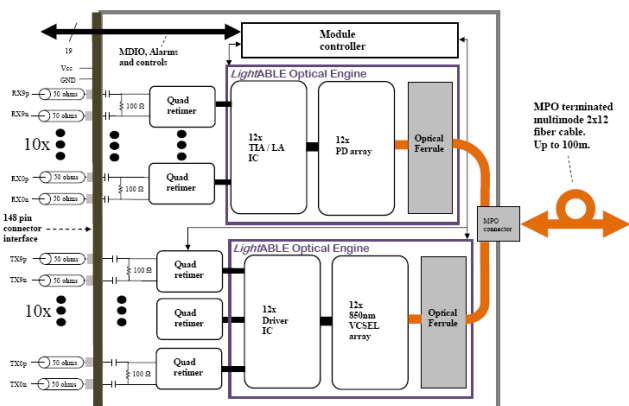

Optical Interface lanes

The figure and table below show the orientation of the multimode fiber facets of the optical connector and the lane assignment respectively.

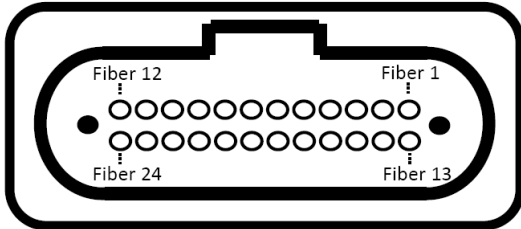

Outside view of the CFP module MPO receptacle

Fiber #	Lane Assignment	Fiber #	Lane Assignment
1	Unused	13	Unused
2	RX0	14	TX0
3	RX1	15	TX1
4	RX2	16	TX2
5	RX3	17	TX3
6	RX4	18	TX4
7	RX5	19	TX5
8	RX6	20	TX6
9	RX7	21	TX7
10	RX8	22	TX8
11	RX9	23	TX9
12	Unused	24	Unused

The Reflex 100GBASE-SR10 module is compliant to the CFP MSA mechanical dimensions.

Ordering information:

Part Number	Description
CF-X12-C11801-02	100G Ethernet, CFP Fiber Optic Transceiver Module (100 Gbps, 10.3 Gbps per channel/RX and TX).
CF-X12-C11901-02	100G OTU4, CFP Fiber Optic Transceiver Module (100 Gbps, 10.3 and 11.2 Gbps per channel/RX and TX).

For more information on this or other products: Contact sales at 1-408-501-8886 or by email at sales@reflexphotonics.com


© Copyright 2011, Reflex Photonics Inc.

This document including pictures and drawings contains information about a new product during its early phase of development. The information contained herein is given to describe certain components and shall not be considered as a guarantee of characteristics. Reflex Photonics reserves the right to change the design or specifications of the product at any time without notice. The material is provided as is and without any warranties, including but not limited to warranties of non-infringement, description and fitness for a particular purpose.

Document revision history

Rev	Description	Released
1	First Draft	
2		
3	New pictures, new numbering system (TO)	2011 OCT 25

Mechanical Considerations:

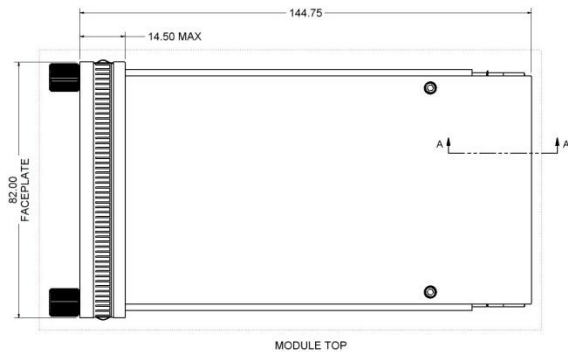

Top view of module